


SpeechCAT Instructions for 1CapApp

To stream text using 1CapApp, change the settings in the station editor.

1. Create template using the name “1CapApp”
2. Select “Markers Add Punctuation”.
3. Select “Dragon Uses Feed Governor” 1 and 20.
4. Do capitalize all unless specifically requested, otherwise it is upper and lower case.

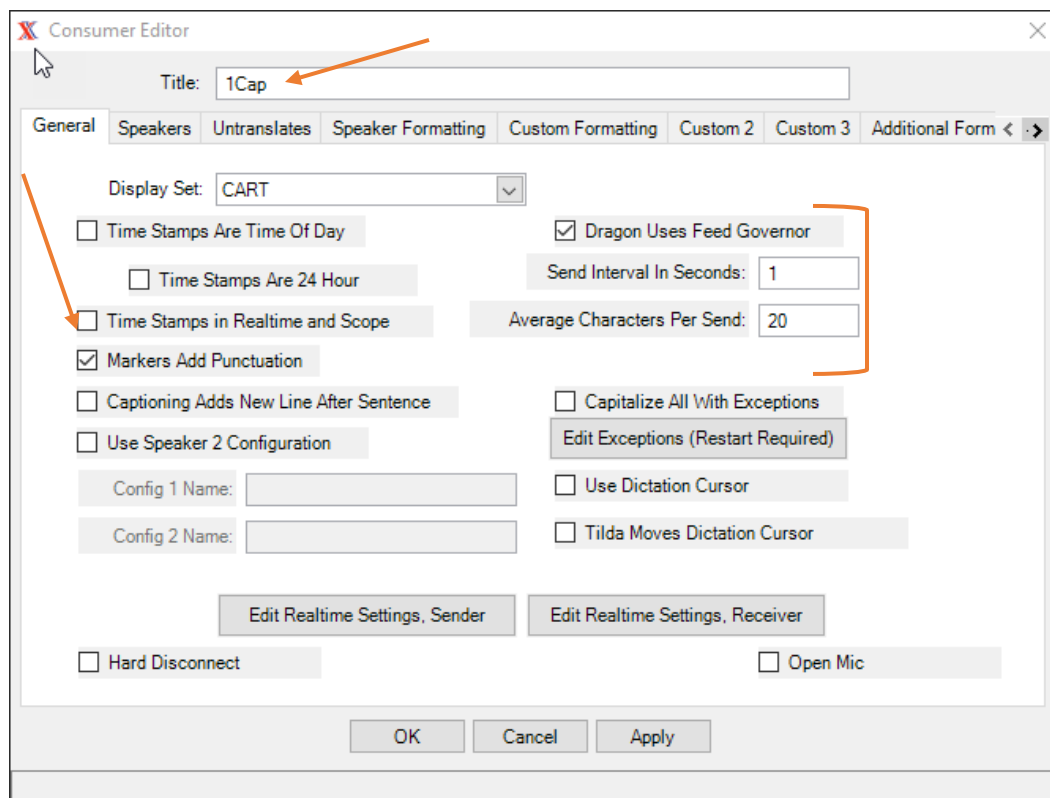

Next, select “Edit Realtime Settings, Sender.”

1. Choose “Serial” as Connection Method.
2. Choose “Other” from drop-down “Viewer”.
3. Under “Serial Settings” select Comm Port (I suggest 11).

You will not need to fill out any further information as is illustrated below. Continue to fill out the information for speakers and untranslates according to instructions given to you by company or consumer.

Feed Settings (Sender)

Connection Method: Serial
 Viewer: Other

File Settings:
 File Name: C:\captioning.txt Browse

☐ **User Name / Password**
 User Name:
 Password:

Internet Settings: My IP Address: 192.168.0.10
 Receiver's IP Address: Port:

Serial Settings:
 Comm Port: COM 11
 Line Speed: 9600
 Parity: None
 Data Bit: 8
 Stop Bit: 1
 Handshaking: None
 Phone Number:

Caption Encoder Settings:
 Characters Per Line: 32 Rollup Rows: 3
 Data Service: C1 Display Row: 15

OK Cancel Apply

NOTE Comm Port in SpeechCAT must match 1Connect as illustrated below:

1Connect - One click and you're in

File

1CapApp Login

Username: Cales64
 Password:
 Server: 1CapApp US
 Secure connection: ☒
 Communication Device: COM (Serial)
 COM Port: 9

Connect

Disconnected 1Connect V1.9.3 © 1CapApp